



Model: GS9218

Power: 2600w
 Size: 323x240x205mm
 Adjustable distance: 15° ± 3cm
 Air temperature: 50°C~58°C
 Continued duration: 30 sec~ 45 sec
 Motor speed: 4300 r.p.m
 Fan speed: 25m/s
 Dimension: 585x420x260mm
 Body cover: Alloy Aluminum
 N.w.: 10.5kgs
 G.w.: 12kgs

Available in chrome & white



Model: GS9212(YD-250)

Size: 275x200x230 mm
 Adjustable distance: 12 ± 3 cm
 Air temperature: 48°C~54°C
 Continued duration: 40 sec. -1 min
 Motor speed: 2830 r.p.m
 Power: 1650W
 Fan speed: 8m/s
 Body cover: alloy aluminum
 Package: 2pcs/CTN
 Dimension: 520x320x240 mm
 G.W:11KGS



Model: GS9213-1(YD-251)

Size: 290x163x216 mm
 Adjustable distance: 12 ± 3 cm
 Air temperature: 48°C~54°C
 Continued duration: 40 sec. -1 min
 Motor speed: 2830 r.p.m
 Power: 1650W
 Fan speed: 8m/s
 Body cover: alloy aluminum
 Package: 2pcs/CTN
 Dimension: 560x350x225 mm
 G.W:11KGS



**Model: GS9213-3
Push Button**

Size: 290x163x216 mm
 Air temperature: 48°C~54°C
 Continued duration: 40 sec. -1 min
 Motor speed: 2830 r.p.m
 Power: 1650W
 Fan speed: 8m/s
 Body cover: alloy aluminum
 Package: 2pcs/CTN
 Dimension: 560x350x225 mm
 G.W:11KGS



Model: GS9219-1

Power: 1400w
Automatic
Size: 237x255x137mm
Adjustable distance: 15 ± 3 cm
Air temperature: 45°C-55°C
Continued duration: 58 sec-1min
Motor speed: 2830 r.p.m
Fan speed: 8m/s
Body cover: Alloy Aluminum
Package: 4 pcs/CTN
G.w.: 15kgs
Dimension; 575x310x360mm



Model: GS9219-2

Push Botton

Power: 1400w
Automatic
Size: 237x255x137mm
Air temperature: 45°C-55°C
Continued duration: 50 sec
Motor speed: 2830 r.p.m
Fan speed: 8m/s
Body cover: Alloy Aluminum
Package: 4 pcs/CTN
G.w.: 15kgs
Dimension; 575x310x360mm



Model: GS9214(YD-252)

Size: 300x130x230 mm
Adjustable distance: 12 ± 3 cm
Air temperature: 48°C-54°C
Continued duration: 40 sec. -1 min
Motor speed: 2830 r.p.m
Power: 1350W
Fan speed: 8m/s
Body cover: iron
Package: 2pcs/CTN
Dimension: 550x360x180 mm
G.W:10KGS

CE OEM AVAILABLE



Model: GSX-1900

Size: 200x240x140 mm
Air temperature: 65°C
Motor speed: 4500 r.p.m
Power: 1000 W
Fan speed: 10-11 m/S
Body cover: ABS (Fire resistant)
Package: 6pcs/CTN
Dimension: 712x337x400 mm
G.W:12.8KGS
Action Mode: Hand touching



Model: GSX-1900A

Size: 200x240x140 mm
Adjustable distance: 12-18 cm
Air temperature: 65°C
Motor speed: 4500 r.p.m
Power: 1000 W
Fan speed: 10-11 m/S
Body cover: ABS (Fire resistant)
Package: 6 pcs/CTN
Dimension: 712x337x400 mm
G.W:12.8 KGS



Model: GSX-1800

Size: 230x230x190 mm
Adjustable distance: 12-18 cm
Air temperature: 69°C
Motor speed: 2700 r.p.m
Power: 1500 W
Fan speed: 8 m/S
Body cover: Alloy aluminum
Package: 4 pcs/CTN
Dimension: 600x300x480 mm
G.W:18.3 KGS

CE OEM AVAILABLE



Model: GSX-2000A

1. This appliance will stop working when the hands keeping drying more than one minute or one second after moving away.
2. Its cover is made of aluminum alloy, both elegant and solid;
3. It has the function of auto overheating protection;
4. Featured with digit circuit control, infrared sensor, good interference resistant capacity and reliable quality.

Voltage: 220V~50Hz
 Rated Power: 1700 W
 Current: 7.6A
 Water splash proof: IPX1
 Dimension: 564X316X392(mm)
 Package: 15.8kg/4pcs



Model: GSX-1800A

1. Its cover is made of aluminum alloy, both elegant and solid ;
2. This appliance will stop working when the hands keeping drying more than one minute or one second after moving away;
3. Auto overheating protection;
4. Featured with digit circuit, infrared sensor, good interference resistant capacity and reliable quality.

Voltage: 220V~50Hz
 Rated Power: 1800 W
 Current: 8.1A
 Water splash proof: IPX1
 Dimension: 605X325X498(mm)
 Package: 16.2kg/4PCS



Model: GSX-2000

Size: 270x210x160 mm
 Adjustable distance: 12-18 cm
 Air temperature: 63°C
 Motor speed: 4800 r.p.m
 Power: 1400 W
 Fan speed: 13 m/S
 Body cover: Alloy aluminum
 Package: 4 pcs/CTN
 Dimension: 500x325x455 mm
 G.W: 15.4 KGS

CE OEM AVAILABLE



Model: GS9217

Power supply: AC220V 50Hz
 Power: 1000 W
 Air temperature: Max.80°C
 Package: 8 PCS/CTN
 Dimension: 500x440x420 mm
 G.W: 21.9 kgs
 Shaver socket



Model: GS9215

Power supply: AC220V 50Hz
 Power: 700 W
 Air temperature: Max.80°C
 Package: 8 PCS/CTN
 Dimension: 500x440x420 mm
 G.W: 21.9 kgs

CE OEM AVAILABLE



Model: GS9216

Power supply: AC220V 50Hz
Power: 300W/700W
Air temperature:Max.77°C
Package: 8 PCS/CTN
Dimension: 540x330x440 mm
G.W: 14.9 kgs

HAIR DRYER

www.China-bathroom.com www.China-sanitaryware.com www.China-handdryer.com



Model: RCY100-23A

Beauty-hair product's the outside shell of resists is made by fire-retardant material that resistance to impact. Both sturdy socket is in the newest fixed design, Spring power line is easy to use and it is safe, Guarded switch is fixed. Power is strong. It's absolute the necessary equipment for hotel and house and more noble.

Voltage: AC220V 50Hz
Power: 1000W
Current: 4.6A
Dimension: 530mmX290mmX425 mm
G.W: 14kg

HAIR DRYER

www.China-bathroom.com www.China-sanitaryware.com www.China-handdryer.com

Model: GS9216-1

1. This appliance will stop working when it works more than 18 minutes consecutively or is hung up;
2. The working time and hot air temperature is displayed by the LCD screen;
3. The temperature in the air outlet will not be changed by the ambient temperature;
4. There are two temperature up or down buttons.
5. There are five(5) heating levels and can be set freely.

Power supply: AC220V 50Hz
Power: 1000 W
Package: 8 PCS/CTN
Dimension: 540x330x440 mm
G.W: 15.9 kgs



CE OEM AVAILABLE

Model: RCY120-18A

1. There is an effortless button that starts and stops this appliance easily;
2. There is a transparent cover to keeping water and away from this appliance that designed in a style to optimized space and be more decorative;
3. There are shaver socket, power switch and indicator on this unit.

Voltage: 220V~50Hz
Rated Power: 1200W
Current: 5.4A
Auto guard against electric shock:
Dimensions: 555x265x422(mm)
Package: 18kg



CE OEM AVAILABLE

SHAVER LIGHT



Model: ESH60D-01

Dual voltage shaver light less lamp, white
Max.60W. Cap Type S15
Dimensions: 430X55X72mm
IP20 [PQ1]

Model: ESH60-01

Dual voltage shaver light less lamp, white
Max.60W. Cap Type S15
Dimensions: 445X75X65mm
IP20 [PQ15]



Model: ESH60-02

Input: AC230V ~ 240V
Output: AC115V ~ 230V
Max: 20W
Max load: 60W



Model: ESH60-03

Input: AC230V ~ 240V
Output: AC230V ~ 240V
Max: 20W
Max load: 60W



Model: XC-20

Shaver socket
Dimensions: 445X75X65mm
N.W.:0.7kgs



Model: XC-21

Dual Voltage shaver Socket
Input: 230V 50Hz 20VA
Output: 240V/110V,230V/115V
Max: 20W
Max load: 60W

TOILET FLUSHER




Model: YD-355D

Size: 150x150x119 mm
Power supply: DC6V(4 batteries No.2)
Dia. of inlet pipe: 1/2"
Water pressure: 0.05-0.8 MPa
Adjustable distance: 35cm adjustable
Washing time: first 1.5 sce. then 5.5 sec.
Body cover: stainless steel
Package: 4 PCS/CTN
Dimension: 420x285x335
G.W.: 11 kgs


YD-355

150x150x119mm
AC 220V 50/60Hz
1/2"
0.05-0.8 MPa
35cm adjustable
first 1.5 sce. then 5.5 sec.
stainless steel
4 PCS/CTN
420x285x335
11 kgs

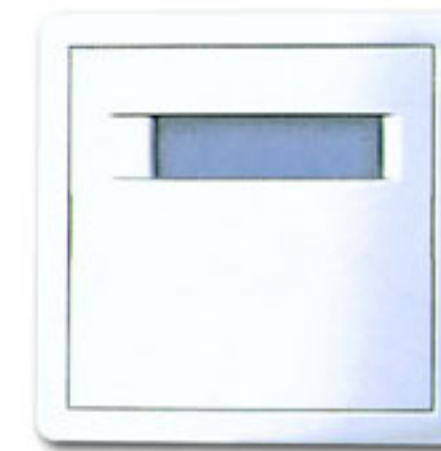

Model: GS9203(YD-354)

Size: 140x140x115 mm
Power supply: AC 220V 50/60Hz
Dia. of inlet pipe: 1/2"
Water pressure: 0.1-0.5 MPa
Adjustable distance: 35cm adjustable
Washing time: first 1.5 sce. then 5.5 sec.
Body cover: ABS
Package: 4 PCS/CTN
Dimension: 380x340x170
G.W.: 10.5 kgs

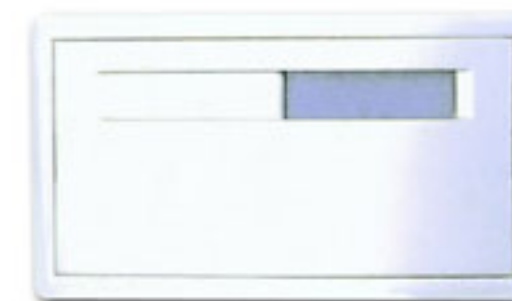

Model: GS9202(YD-352) YD-353

Size: 220x125x115 mm
Power supply: DC 6V(4 batteries No.2)
Dia. of inlet pipe: 1/2"
Water pressure: 0.1-0.5 MPa
Adjustable distance: 35cm adjustable
Washing time: 5.5 sec
Body cover: ABS
Package: 4 PCS/CTN
Dimension: 360x260x330
G.W.: 12 kgs

220x125x115 mm
AC 220V 50/60Hz
1/2"
0.1-0.5 MPa
35cm adjustable
first 1.5 sce. then 5.5 sec.
ABS
4 PCS/CTN
360x260x330
12 kgs



Model: GS9201(YD-350) YD-351

Size: 290x110x97 mm
Power supply: DC 6V(4 batteries No.2)
Dia. of inlet pipe: 1/2"
Water pressure: 0.1-0.5 MPa
Adjustable distance: 30cm adjustable
Washing time: 5.5 sec
Body cover: ABS
Package: 8 PCS/CTN
Dimension: 560x300x320
G.W.: 13 kgs

290x110x97 mm
AC 220V 50/60Hz
1/2"
0.1-0.5 MPa
30cm adjustable
first 1.5 sce. then 5.5 sec.
ABS
8 PCS/CTN
560x300x320
13 kgs



Model: GS9904(YD-150)

Infrared sensor activated

Size: 210x142x102 mm
Power supply: DC6V(4No.5 batteries)
Sensing range: 4~12 cm
Capacity: 500 ml
Package: 12 PCS/CTN
Dimension: 460x350x380 mm
G.W/N.W: 9/7 kgs



Model: GS9912

Infrared sensor activated/Hand touching

Power supply: DC9V
Sensing range: 0~12 cm
Package: 18 PCS/CTN
Dimension: 610x350x340 mm
G.W: 13 kgs



Model: GS9900

Automatic foam soap dispenser

Size: 270x140x160 mm
Power supply: DC5V~6.3V (4No.5 batteries)
Sensing range: 5~8 cm
Capacity: 1000 ml
Package: 6 PCS/CTN
Dimension: 610x360x320 mm
G.W/N.W: 9/8 kgs

CE OEM AVAILABLE



ZYQ-138

ZYQ-138S

Model: ZYQ-138/ZYQ-138S

1. Easy to assemble and separate for using in assembled units or separated unit;
2. There is a lock applied to lock its cover for keeping dust away and fix its body on the brevent to prevent from losing;
3. It's made of constuction plasic and suitable for dispensing shower gel, shampoo, washing lotion etc.;
4. It's newly designed to be suitable for decora tion in various places.

Capability: 380ml
One drop is of: 1.5ml
Dimensions: 510x275x425(mm)(ZYQ-138)
405X342X418(mm)(ZYQ-138S)
Package: 9.1kg(ZYQ-138)
9.8kg(ZYQ-138S)



Model: ZYQ-110


1. There will be one drop down once three seconds when the hands are holding on till ten (10)times of consecutive dropping;
2. Featured will digit circuit, infrared sensor, and good interference resistant capacity;
3. It's made of construction plastic and suitable for dispensing shower gel, shampoo, washing lotion etc.;
4. Motivated by Normal batteries.

Voltage: 4x1.5V LR6
Capability: 1100W
One drop is of: 1ml
Dimensions: 505x300x375(mm)
Package: 11.3kg

CE OEM AVAILABLE

SOAP DISPENSER


GENESIS
QUALITY PRODUCT

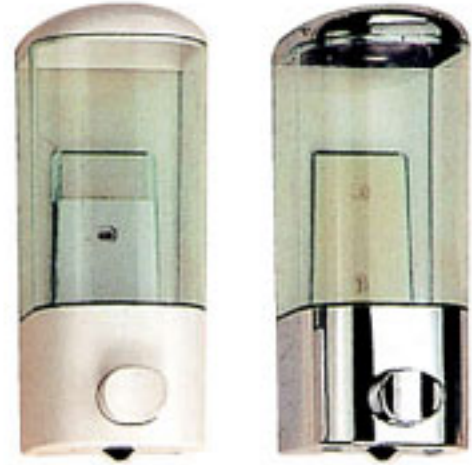

Model: GS9908	GS9908-C
Material plastic	Plastic, chrome plated
Capacity: 500 ml	500 ml
Package: 60 PCS/CTN	60 PCS/CTN
Dimension: 590x465x440 mm	590x465x440 mm
G.W/N.W: 17.8/15.5 kgs	17.8/15.5 kgs
Qty per 20': 240 CTNS	240 CTNS



Model: GS9909	GS9909-C
Material plastic	Plastic, chrome plated
Capacity: 500 ml	500 ml
Package: 60 PCS/CTN	60 PCS/CTN
Dimension: 420x380x580 mm	420x380x580 mm
G.W/N.W: 18.5/17 kgs	18.5/17 kgs
Qty per 20': 313 CTNS	313 CTNS

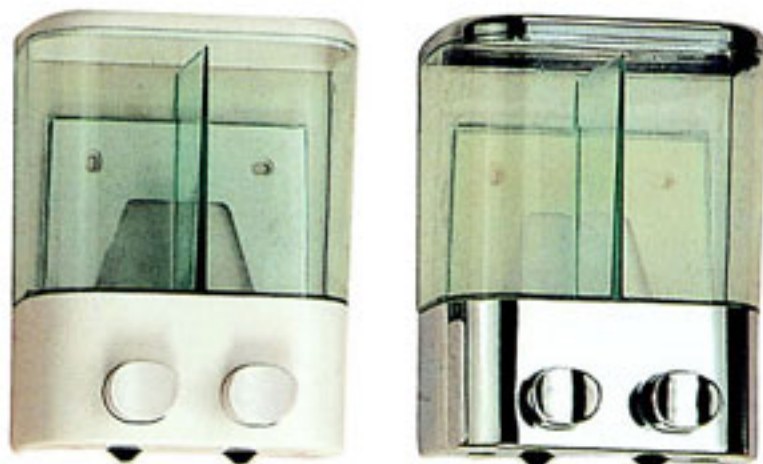

Model: GS9910	GS9910-C
Material plastic	Plastic, chrome plated
Capacity: 1000 ml	1000 ml
Package: 36 PCS/CTN	36 PCS/CTN
Dimension: 530x450x405 mm	530x450x405 mm
G.W/N.W: 17.8/15.5 kgs	17.8/15.5 kgs
Qty per 20': 300 CTNS	300 CTNS

OEM AVAILABLE

SOAP DISPENSER

GENESIS
QUALITY PRODUCT



Model: GS9911
Material: Stainless steel
Capacity: 500 ml
Size: 107x183x115 mm

SOAP DISPENSER

www.China-bathroom.com www.China-sanitaryware.com www.China-handdryer.com



Model: GS9903
Head material: Copper, Chrome plated
Capacity: 350 ml
Package: 60 PCS/CTN
Dimension: 710x610x460 mm
G.W/N.W: 35/33 kgs
Qty per 20': 8433 pcs



Model: GS9901	GS9902
Material: Plastic	Plastic
Capacity: 400 ml	800 ml
Package: 20 PCS/CTN	20 PCS/CTN
Dimension: 435x370x265 mm	560x530x295 mm
G.W/N.W: 8/7 kgs	13/12 kgs
Qty per 20': 12660 pcs	6200 pcs

OEM AVAILABLE



Model: GS9102-RC

With remote sensor
Power supply: DC3V
Jet-perfume adjust time: 1~40 min
Package: 12 PCS/CTN
Dimension: 520x300x230 mm
G.W: 6.2 kgs



Model: GS9108

LED display
Power supply: 2x1.5V R20
3 Work area: daytime, night, 24hours
Package: 12 PCS/CTN
Dimension: 510x320x230 mm



Model: GS9102

Power supply: DC 3V
Jet-perfume adjust time: 1~40 min
Package: 12 PCS/CTN
Dimension: 520x300x230 mm
G.W: 6.2 kgs
Capacity of cylinder: 300 ml/275 ml



Model: GS9103

Power supply: DC 3V
Jet-perfume adjust time: 1~40 min
Package: 12 PCS/CTN
Dimension: 223X105X83 mm
N.W: 0.4 kgs
Capacity of cylinder: 300 ml/275 ml

OEM AVAILABLE



Model: GS-2000

Mini-dehumidifier

Powerful in dehumidifying small areas, such as the cabinet, drawer, exhibition cabinet, musical instrument and all kinds of boxes.

Function:

- a) Absorb moisture without power.
- b) Never replaced, the dehumidizer is effective forever.
- c) See clearly the change of the dehumidizer from the windows.
- d) Have the safety protector and dehumidify automatically.
- e) Absorb the water about 200ml for one time.

Size: 215x116x82 mm

Weight: 1.3 kgs

Volume of dehumidizer: 800ml

Power supply: 110V/50Hz, 220V/60Hz

Average power: 68W

MINI-DEHUMIDIFIER

www.China-bathroom.com www.China-sanitaryware.com www.China-handdryer.com

CE OEM AVAILABLE



Model: HA2000

Bathtub faucet

Water Pressure: 0.049~0.59 MPa

Water Temperature: 5°C~90°C



Model: HA2040

Kitchen faucet

Water Pressure: 0.049~0.59 MPa

Water Temperature: 5°C~90°C



Model: HA2010

Shower faucet

Water Pressure: 0.049~0.59 MPa

Water Temperature: 5°C~90°C



Model: HA2030

Bathtub faucet

Water Pressure: 0.049~0.59 MPa

Water Temperature: 5°C~90°C

CE OEM AVAILABLE



Model: HA2020

Embedded bathtub faucet

Water Pressure: 0.1~0.8 MPa

Water Temperature: 5°C~90°C



Model: HA2050

Shower faucet

Water Pressure: 0.1~0.8 MPa

Water Temperature: 5°C~90°C

CE OEM AVAILABLE